

Total Solutions System

STATIONARY BATTERIES

WINNER[®]

**BATTERY
SWITCH FOR SUCCESS**

AGM GENERAL USE

- Sealed lead acid rechargeable AGM batteries
- For general use both for cyclic and stand by
- Robust construction – Maintenance Free
- Low self discharge – High recovery capacity
- Designed service life: 4-10 years



www.winnerbattery.net

APOLLO


SEALED VRLA MF RECHARGEABLE BATTERY



Type No	Voltage	Capacity	Max Discharge Current in 5"	Recommended Max. Charging Current	Dimensions (mm)				Layout	Terminal	Weight (Kg)
	V	AH C ²⁰	A	A	L	W	H	T.H.			
1-6	6	1	15	0,20	51	42	51	58	2	F1	0,28
1.2-6	6	1,2	18	0,24	97	24	52	59	1	F1	0,30
1.3-6	6	1,3	20	0,26	97	24	52	59	1	F1	0,34
3-6	6	3	45	0,60	66	33	97	104	2	F1	0,60
3.4-6	6	3,4	51	0,68	134	34	60	67	1	F1	0,70
4-6	6	4	60	0,80	70	47	101	106	2	F1	0,70
4.5-6	6	4,5	68	0,90	70	47	101	106	2	F1	0,85
5-6	6	5	75	1,00	70	47	101	106	2	F1	0,89
7.2-6	6	7,2	108	1,44	151	34	94	100	1	F1	1,25
8.5-6	6	8,5	128	1,70	98	56	118	118	2	F1	1,60
12-6	6	12	180	2,40	151	50	95	101	1	F1	1,78
2.7-8	8	2,7	48	0,64	134	37	64	70	4	F1	0,87
0.8-12	12	0,8	12	0,16	96	25	61	61	SPECIAL	CABLE	0,38
1.3-12	12	1,3	20	0,26	97	43	52	59	4	F1	0,60
2-12	12	2	30	0,40	178	35	60	67	1	F1	0,90
2.3-12	12	2,3	35	0,46	178	35	60	67	1	F1	0,96
2.9-12	12	2,9	44	0,58	79	56	99	105	0	F1	1,21
3.4-12	12	3,4	51	0,68	134	67	60	67	4	F1	1,42
4.5-12	12	4,5	68	0,90	90	70	101	107	1	F1	1,72
5-12	12	5	75	1,00	151	50	94	100	3	F1	1,80
5-12B	12	5	75	1,00	90	70	101	107	1	F2	1,76
7-12	12	7	105	1,40	151	65	94	100	3	F1	2,00
7.2-12	12	7,2	108	1,44	151	65	94	100	3	F1-F2	2,40
8.5-12	12	8,5	128	1,70	151	65	94	100	3	F2	2,55
10-12	12	10	150	2,00	151	65	94	100	3	F1	3,25
12-12	12	12	180	2,40	151	98	95	100	3	F1	3,50
17-12	12	17	255	3,40	181	76	167	167	0	F3-F12	5,85
18-12	12	18	270	3,60	181	76	167	167	0	F3-F12	5,85
25-12	12	25	375	5,00	166	175	125	125	0	F3-F12	9,00
28-12	12	28	420	5,60	165	125	175	175	1	F13	9,80
33-12	12	33	495	6,60	196	130	158	163	1	F13	11,95
40-12	12	40	600	8,00	196	165	170	170	0	F13	13,55
45-12	12	45	675	9,00	196	165	170	170	0	F13	14,60
55-12	12	55	825	11,00	229	138	208	212	1	F13	18,50
65-12	12	65	975	13,00	350	166	174	174	1	F13	22,70
70-12	12	70	1050	14,00	350	166	174	174	1	F13	23,65
80-12	12	80	1200	16,00	260	168	208	212	1	F13	25,85
90-12	12	90	1350	18,00	304	168	208	212	1	F18	30,20
100-12	12	100	1500	20,00	329	173	214	221	1	F18	32,40
100-12B	12	100	1500	20,00	304	168	208	212	1	F18	31,50
120-12	12	120	1800	24,00	407	173	210	235	1	F18	38,40
120-12B	12	120	1800	24,00	329	173	214	221	1	F18	33,00
134-12	12	134	2010	26,80	345	173	275	278	1	F18	41,50
145-12	12	145	2175	29,00	345	173	275	278	1	F18	44,00
150-12	12	150	2250	30,00	483	170	240	240	1	F18	44,50
180-12	12	180	2700	36,00	530	209	214	218	1	F18	53,00
200-12	12	200	3000	40,00	530	240	214	218	4	F18	60,00
230-12	12	230	3450	46,00	521	269	214	220	4	F18	67,00
260-12	12	260	3900	52,00	521	269	214	220	4	F18	74,00

More types available on request

KEY FOR LAY OUT

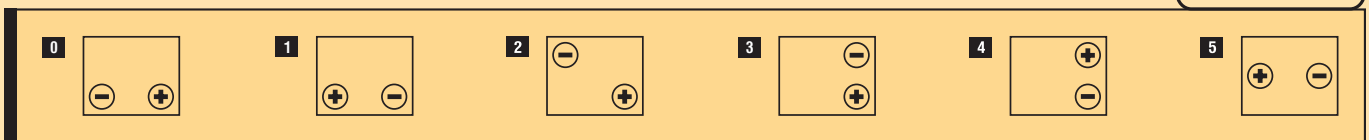

Version: 2013/05

Wherever batteries go



VIOSY S.A. • Central Office:
 17th klm N.R. Athens-Corinth, 19300, Aspropyrgos, Athens, Greece • Tel.: +30 210 3474444 • Fax: +30 210 3479931
<http://www.winnerbattery.net> • e-mail: info@winnerbattery.net • <http://www.viosy.gr> • e-mail: info@viosy.gr