


# Total Solutions System **STATIONARY BATTERIES**

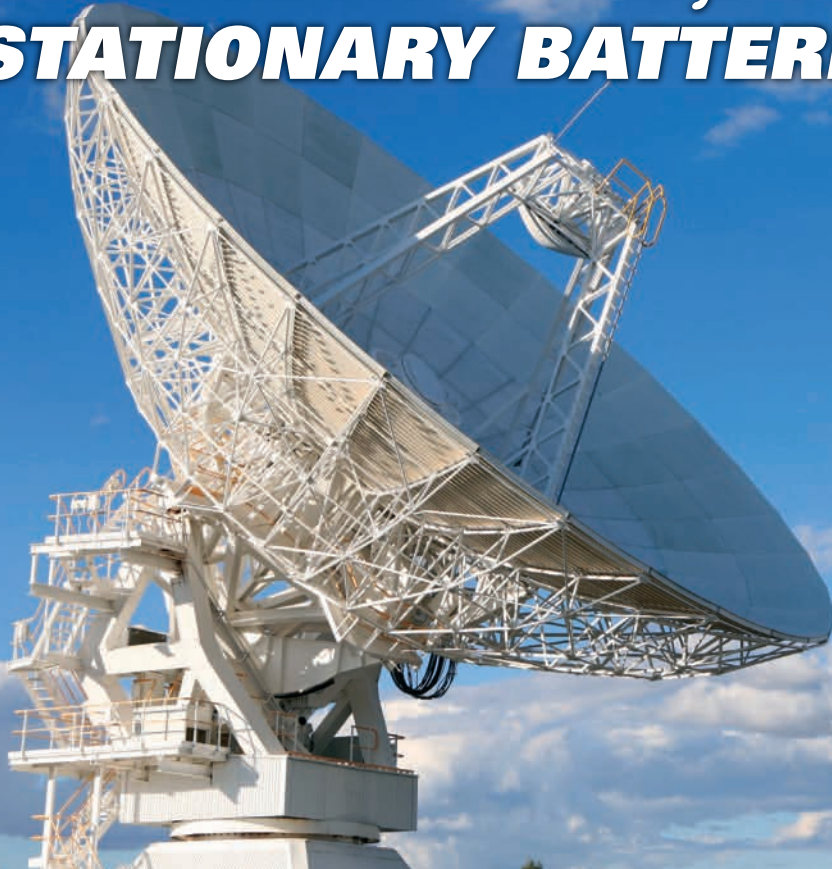

# WINNER<sup>®</sup>

**BATTERY  
SWITCH FOR SUCCESS**

## STATIONARY AGM CELL

- Heavy Duty AGM 2Volts rechargeable cells
- Optimal current acceptance rate
- High energy density – minimum unit space and weight
- Excellent deep cycle life of more than 1.000 cycles with 50% D.O.D.
- Designed service life of 15 years at float charge



[www.winnerbattery.net](http://www.winnerbattery.net)

# NEPTUNE

**HIGH INTEGRITY VALVE REGULATED LEAD ACID BATTERY**




| Type No | Voltage | Capacity | Dimensions (mm) |     |     |      | Layout | Terminal | Weight (Kg) |
|---------|---------|----------|-----------------|-----|-----|------|--------|----------|-------------|
|         | V       | AH (C10) | L               | W   | H   | T.H. |        |          |             |
| 100-2   | 2       | 100      | 171             | 75  | 206 | 212  | 5      | F17      | 6,60        |
| 200-2   | 2       | 200      | 171             | 107 | 330 | 365  | 5      | F17      | 14,00       |
| 300-2   | 2       | 300      | 171             | 151 | 330 | 365  | 5      | F17      | 19,00       |
| 400-2   | 2       | 400      | 211             | 175 | 330 | 365  | 5      | F17      | 26,00       |
| 500-2   | 2       | 500      | 242             | 175 | 330 | 365  | 5      | F17      | 30,50       |
| 600-2   | 2       | 600      | 302             | 175 | 330 | 365  | 5      | F17      | 37,00       |
| 800-2   | 2       | 800      | 410             | 175 | 330 | 365  | 6      | F17      | 50,00       |
| 1000-2  | 2       | 1000     | 475             | 175 | 330 | 365  | 6      | F17      | 62,00       |
| 1200-2  | 2       | 1200     | 475             | 175 | 330 | 365  | 6      | F17      | 71,00       |
| 1500-2  | 2       | 1500     | 401             | 350 | 340 | 382  | 9      | F17      | 96,00       |
| 2000-2  | 2       | 2000     | 490             | 350 | 340 | 382  | 9      | F17      | 127,00      |
| 3000-2  | 2       | 3000     | 710             | 350 | 340 | 382  | 10     | F17      | 193,00      |

More types available on request

**KEY FOR LAY OUT**



**KEY FOR LAY OUT**

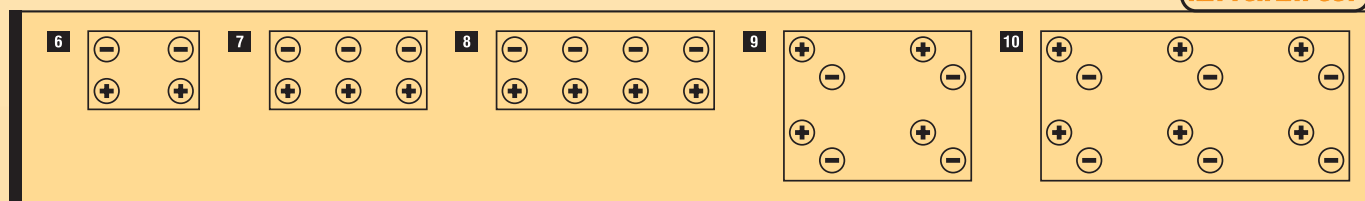


## APPLICATIONS

- Back up power supply for UPS & telecommunication systems
- Telecommunications / Mobile network
- Emergency power supply for ship & marine use
- Stand by support power supply for petrochemical, oil and gas sub-stations
- Railway / airport power support
- Power supply / Energy storage for remote houses

## STANDARDS

- IEC60896-21/22 2004 • BS EN 61427-2002

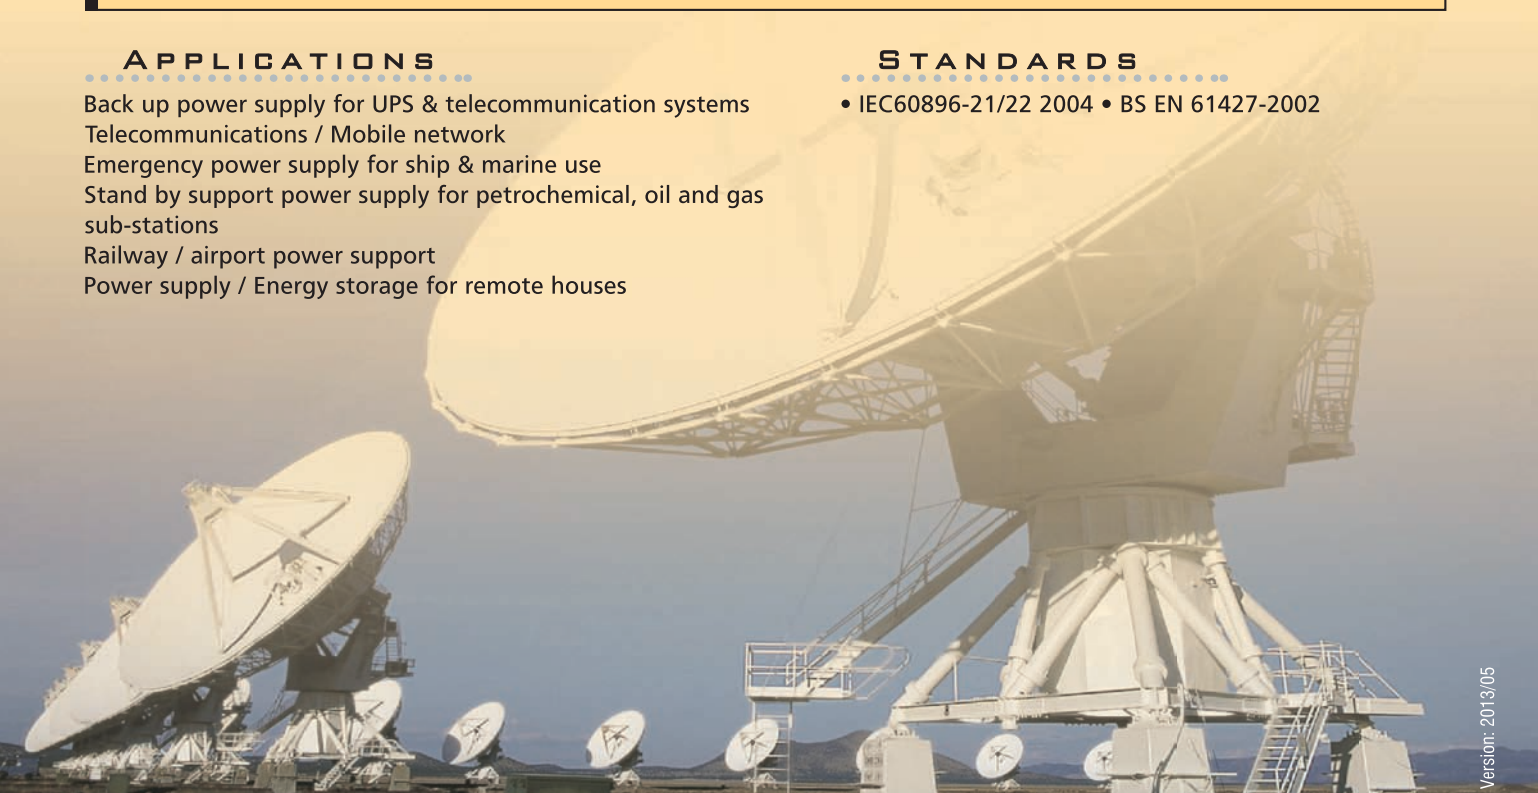

Version: 2013/05

Wherever batteries go



VIOSY S.A. • Central Office:  
 17th klm N.R. Athens-Corinth, 19300, Aspropyrgos, Athens, Greece • Tel.: +30 210 3474444 • Fax: +30 210 3479931  
<http://www.winnerbattery.net> • e-mail: [info@winnerbattery.net](mailto:info@winnerbattery.net) • <http://www.viosy.gr> • e-mail: [info@viosy.gr](mailto:info@viosy.gr)